


PREMIUM

BISOL BIPV

Monocrystalline Roof Integrated PV Modules / BSO 425-435 Wp

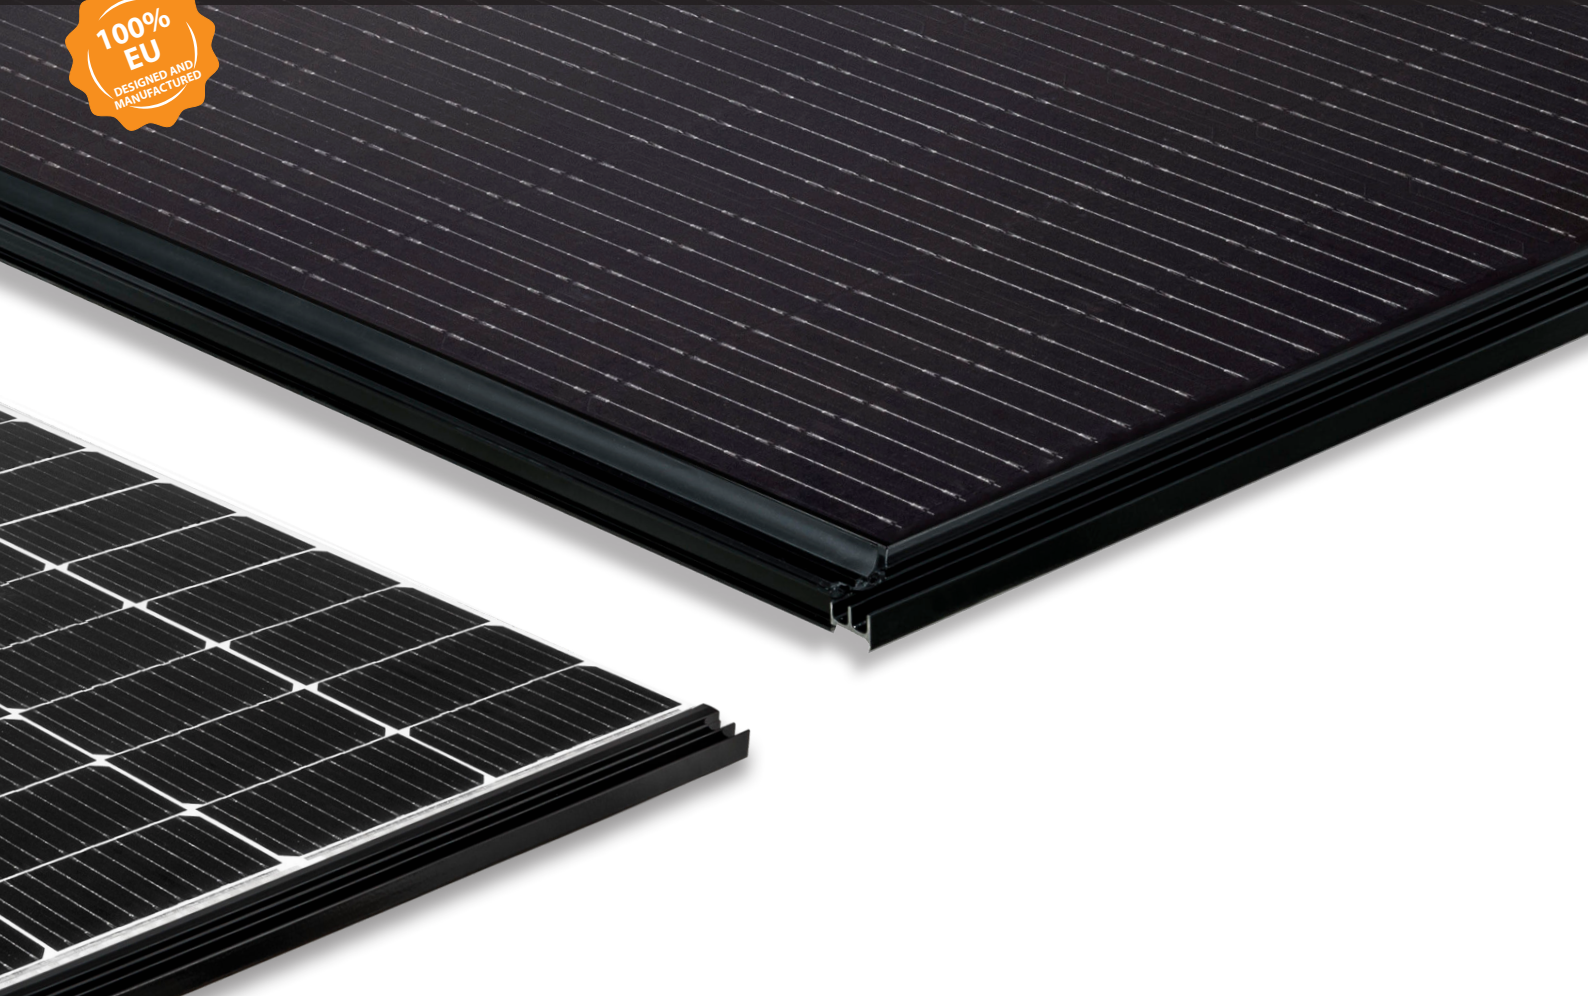

Designed and
manufactured in EU



Replaces
conventional roof tiles



PID free



Limited shading



Module presorting
for higher profitability



Supremely low degradation



Module efficiency
up to 22.3 %




Up to 13 % higher
real-life performance



Excellent low light
performance

Guarantees:

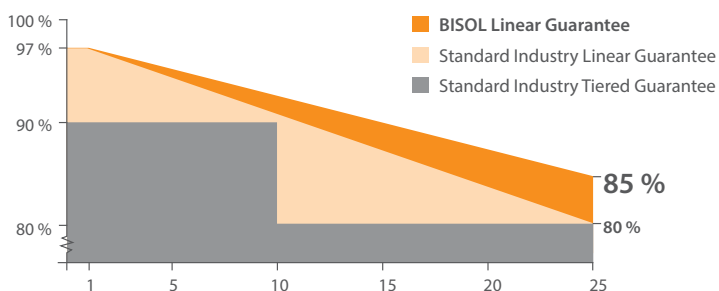

Linear Guarantee
85 % power output
in 25th year




Product Guarantee
Standard: 15 years
Extra: 20 years


In compliance with:




I-V Curve at Various Irradiation Levels

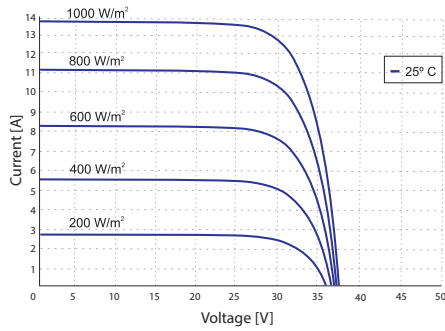

I-V Curve at Various Cell Temperatures

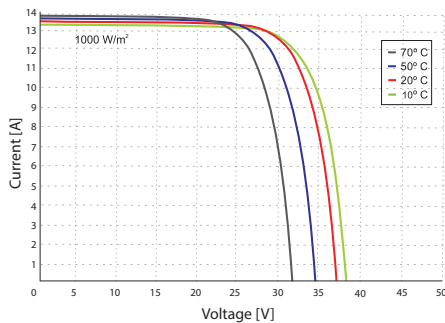

Dimensions

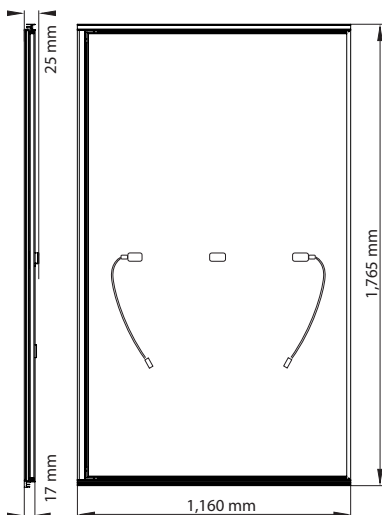

Electrical Specifications @ STC (AM 1.5, 1,000 W/m², 25 °C):

Module Type	BSO	425	430	435
Nominal Power	P_{MPP} [W]	425	430	435
Short Circuit Current	I_{SC} [A]	14.3	14.4	14.4
Open Circuit Voltage	V_{OC} [V]	37.9	38.1	38.2
MPP Current	I_{MPP} [A]	13.6	13.7	13.8
MPP Voltage	V_{MPP} [V]	31.3	31.4	31.6
Module Efficiency	η_M [%]	21.8	22.0	22.3
Cell Efficiency	η_C [%]	23.8	24.0	24.3
Power Output Tolerance		0/+5 W		
Maximum System Voltage		1,500 V		
Maximum Reverse Current		25 A		
Protection Class		Class II		

Additional power classes available upon request. I Efficiency at irradiation 200 W/m²: 99.3 % of STC efficiency or higher. I Tolerances for V_{OC} and I_{SC} and other electrical parameters are ± 3 %.

Electrical Specifications @ NOCT (800 W/m², 42 °C, AM 1.5, Wind 1 m/s):

Module Type	BSO	425	430	435
Nominal Power	P_{MPP} [W]	326.0	329.0	333.0
Short Circuit Current	I_{SC} [A]	11.53	11.61	11.61
Open Circuit Voltage	V_{OC} [V]	36.3	36.5	36.6
MPP Current	I_{MPP} [A]	10.96	11.04	11.12
MPP Voltage	V_{MPP} [V]	29.8	29.8	30.0

Thermal Specifications:

Current Temperature Coefficient	α	+ 0.045 %/°C
Voltage Temperature Coefficient	β	- 0.250 %/°C
Power Temperature Coefficient	γ	- 0.300 %/°C
NOCT		42 $\pm$ 3 °C
Temperature Range		- 40 °C to + 85 °C

Mechanical Specifications:

Length x Width x Thickness	1,765 x 1,160 x 25 mm
Weight	22.5 kg
Solar Cells	108 Half-Cut c-Si / 182 mm x 91 mm
Junction Box / Connectors / IP	3 bypass diodes / MC4 compatible / IP 68
Cable Length	Default: 1,200 mm
Frame	Solrif® / thickness: 17 mm
Glass	3.2 mm AR coating tempered glass / high-transparency / low-iron content
Impact Resistance	Hailstone / Φ 25 mm / 83 km/h (51 mph)

Tolerances of values are ± 5 %. Unspecified product properties remain under full discretion of BISOL Production.

Packaging Information:

Modules per Pallet	Packaging Dimension: Length/Width/Height	Stackable	Packaging Weight	Tot. Nr. of Pallets/Load
24	191 x 120 x 136 cm	2 pallets	580 kg	28

Additional terms & conditions apply. Please see *Standard Limited Guarantee* and *General Sales Terms & Conditions*.

© BISOL Production Ltd. September 2024. All rights reserved. All information presented in this document is subject to change without prior notice and serve for informative purposes only.